


FILTER PAPERS

Technical Sheet

CL-506

Weight	85 [g/m ²]
Thickness	0,2 [mm]
Filtration speed	27 [s]
Surface	smooth
Ash content	< 0,1 (%)
Average retention capacity	4 - 12 [μm]

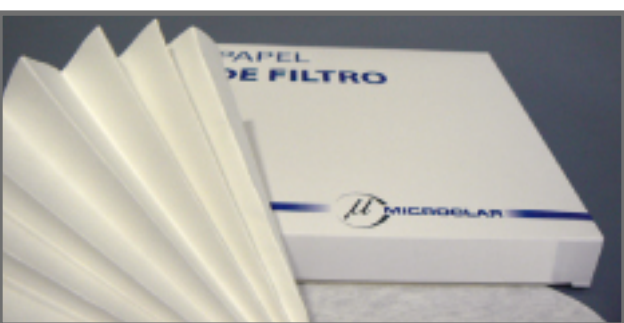

Applications and properties

Medium fast filtration, e. g. for sulphides, lead-chromate and calcium oxalate.

These data are typical values and must not be regarded as specification.