


## FILTER PAPERS

Technical Sheet

CN-540

Weight	85 [g/m <sup>2</sup> ]
Thickness	0,2 [mm]
Filtration speed	27 [s]
Surface	smooth
Ash content	< 0,01 (%)
Average retention capacity	4 - 12 [μm]

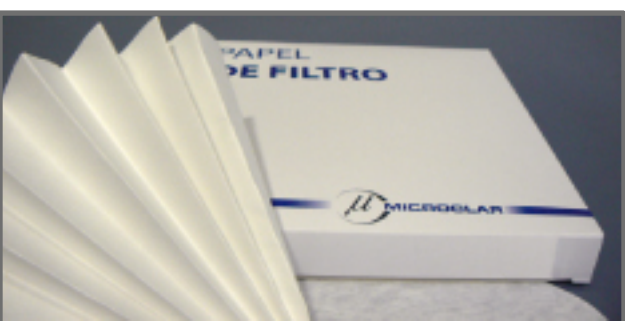

### **Applications and properties**

Ashless, medium fast filtration, e.g. for sulphides, lead chromate, calcium oxalate .

These data are typical values and must not be regarded as specification.