


## FILTER PAPERS

Technical Sheet

CN-541

|                            |                        |
|----------------------------|------------------------|
| Weight                     | 85 [g/m <sup>2</sup> ] |
| Thickness                  | 0,2 [mm]               |
| Filtration speed           | 9 [s]                  |
| Surface                    | smooth                 |
| Ash content                | < 0,01 (%)             |
| Average retention capacity | 7 - 12 [μm]            |

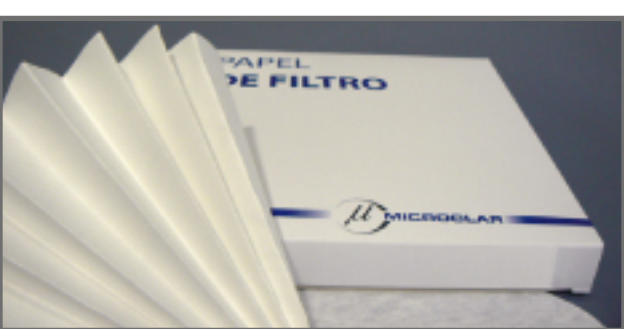

### **Applications and properties**

Ashless, fast filtration, for coarse precipitates e.g. iron- and aluminium- hydroxide, bismuth- copper- and iron-sulphide, nickel diacetyldioxime.

These data are typical values and must not be regarded as specification.